

PCT


WORLD INTELLECTUAL PROPERTY ORGANIZATION
International Bureau



INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification 6 : <u>G01R 15/24</u>		A1	(11) International Publication Number: WO 98/58268
			(43) International Publication Date: 23 December 1998 (23.12.98)
(21) International Application Number: PCT/US98/12341 (22) International Filing Date: 10 June 1998 (10.06.98) (30) Priority Data: 08/880,111 19 June 1997 (19.06.97) US (71) Applicant: THE TEXAS A & M UNIVERSITY SYSTEM [US/US]; 310 Wisenbaker Engineering Center, College Station, TX 77843-3369 (US). (72) Inventors: BLAKE, James, N.; 16537 Woodlake Drive, College Station, TX 77845 (US). SHORT, Shayne, X.; 907 Wheelock Street, Hearne, TX 77859-3037 (US). (74) Agent: JEANG, Wei, Wei; Baker & Botts, L.L.P., 2001 Ross Avenue, Dallas, TX 75201-2980 (US).			(81) Designated States: AL, AM, AT, AT (Utility model), AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, CZ (Utility model), DE, DE (Utility model), DK, DK (Utility model), EE, EE (Utility model), ES, FI, FI (Utility model), GB, GE, GH, GM, GW, HU, ID, IL, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SK (Utility model), SL, TJ, TM, TR, TT, UA, UG, UZ, VN, YU, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG). Published With international search report. Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.

(54) Title: FIBER OPTIC INTERFEROMETRIC SENSOR

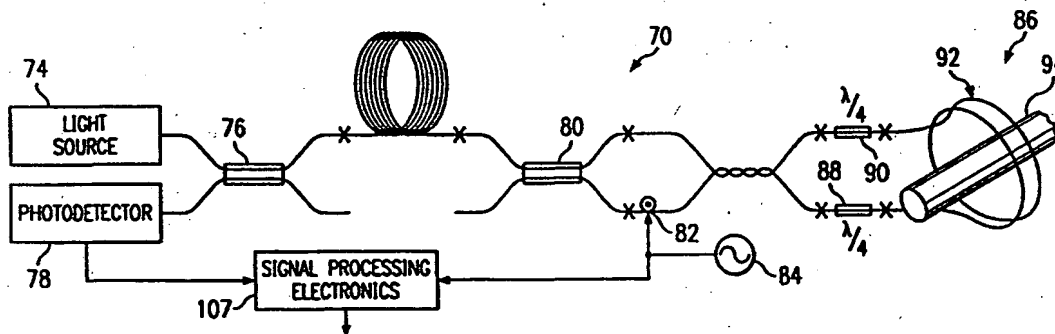

(57) Abstract

A fiber optic interferometric sensor (10, 70) includes a sensing fiber (32, 92) which forms a closed optical path around a current-carrying conductor (44, 94). The sensing fiber (32, 92) has a predetermined number of twists which causes a predetermined amount, T, of circular rotation of the polarization state of the light waves traveling on the optical path, thereby reducing a scale factor error introduced by linear birefringence in the sensing fiber.

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece			TR	Turkey
BG	Bulgaria	HU	Hungary	ML	Mali	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MN	Mongolia	UA	Ukraine
BR	Brazil	IL	Israel	MR	Mauritania	UG	Uganda
BY	Belarus	IS	Iceland	MW	Malawi	US	United States of America
CA	Canada	IT	Italy	MX	Mexico	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NE	Niger	VN	Viet Nam
CG	Congo	KE	Kenya	NL	Netherlands	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NO	Norway	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	NZ	New Zealand		
CM	Cameroon			PL	Poland		
CN	China	KR	Republic of Korea	PT	Portugal		
CU	Cuba	KZ	Kazakstan	RO	Romania		
CZ	Czech Republic	LC	Saint Lucia	RU	Russian Federation		
DE	Germany	LI	Liechtenstein	SD	Sudan		
DK	Denmark	LK	Sri Lanka	SE	Sweden		
EE	Estonia	LR	Liberia	SG	Singapore		

FIBER OPTIC INTERFEROMETRIC SENSOR

TECHNICAL FIELD OF THE INVENTION

This invention is related in general to the field of fiber optic sensors. More particularly, the invention is related to an improved fiber optic interferometric sensor and method therefor.

BACKGROUND OF THE INVENTION

Sagnac interferometer type current sensors operate by measuring the Faraday effect-induced phase shift of circularly polarized light waves traveling in a closed path around a current carrying wire. Fiber optic current sensors are advantageous over iron-core current transformers, since fiber optic sensors are non-conductive and light weight. Further, fiber optic sensors do not exhibit hysteresis and provide a much larger dynamic range and frequency response. An in-line and a loop version of the fiber optic interferometric sensor are described in detail in allowed U.S. patent application titled "Fiber Optic Interferometric Current and Magnetic Field Sensor," Serial No. 08/620,121, and filed on March 26, 1996 by James N. Blake, incorporated herein by reference.

However, linear birefringence in the sensing region of the fiber optic sensor may cause large scale factor errors. The linear birefringence may be introduced by imperfections

in the fiber, such as internal asymmetry. Linear birefringence is also introduced by the bending of the fiber around the current-carrying conductor in the sensing region. Therefore, it is nearly impossible to eliminate the linear birefringence without annealing the fiber. Further, because the linear birefringence and therefore the scale factor error varies with temperature and other environmental variables, it is difficult to predict and correct for it with sufficient accuracy.

SUMMARY OF THE INVENTION

Accordingly, there is a need for an improved fiber optic interferometric sensor that has greatly reduced or eliminated the effects of linear birefringence-induced scale factor error.

In accordance with the present invention, an improved fiber optic interferometric sensor is provided which eliminates or substantially reduces the disadvantages associated with prior devices caused by linear birefringence.

In one aspect of the invention, a fiber optic interferometric sensor includes a sensing fiber which forms a closed optical path around a current-carrying conductor. The sensing fiber has a predetermined number of twists which causes a predetermined amount, T , of circular rotation of the polarization state of the light waves traveling on the optical path, thereby reducing a scale factor error introduced by linear birefringence in the sensing fiber.

In another aspect of the invention, a fiber optic interferometric sensor includes a sensing fiber having a circular birefringence such that the polarization state of the light traveling therein is rotated by T , where $\tan 2T = 2T$ for an in-line sensor or $\tan T = T$ for a loop sensor.

In another aspect of the invention, a method of forming a sensing fiber for a fiber optic interferometric sensor includes the steps of adding a predetermined amount of circular birefringence to the sensing fiber, and forming a closed path around a current-carrying conductor with the sensing fiber.

In yet another aspect of the invention, a method of forming a sensing fiber for a fiber optic interferometric sensor includes the steps of winding a sensing fiber around a generally circular hoop and forming a closed path around a current-carrying conductor.

A technical advantage of the present invention is the reduction or elimination of scale factor errors introduced by linear birefringence in the sensing fiber. The sensing fiber is twisted only a small number of times to achieve a circular birefringence sufficient to nullify the scale factor errors.

BRIEF DESCRIPTION OF THE DRAWINGS

For a better understanding of the present invention, reference may be made to the accompanying drawings, in which:

FIGURE 1 is a schematic diagram of an in-line fiber optic interferometric current sensor according to the teachings of the present invention;

FIGURE 2 is a schematic diagram of a loop fiber optic interferometric current sensor according to the teachings of the present invention;

FIGURE 3 is a simplified diagram of a helically-wound sensing region according to the teachings of the present invention; and

FIGURE 4 is a plot of rotation caused by circular birefringence versus scale factor percentage error according to the teachings of the present invention.

DETAILED DESCRIPTION OF THE INVENTION

The preferred embodiments of the present invention are illustrated in FIGURES 1-4, like reference numerals being used to refer to like and corresponding parts of the various drawings.

Referring to FIGURE 1, a current sensor 10 constructed according to the teachings of the present invention comprises a broadband light source 12, which introduces a broadband light having multiple optical frequency components into a optic fiber pigtail 14. Optic fiber pigtail 14 is preferably a length of polarization maintaining fiber. Polarization maintaining fiber pigtail 14, is joined to a polarization maintaining beam splitter or directional coupler 16 where a portion of the light is directed to a polarizer 18 and the remaining light is terminated at a non-reflective termination point 20. The light beam passes through polarizer 18, which linearly polarizes the light. The eigen-axes of polarization maintaining fiber pigtail 14, polarization maintaining beam splitter 16, and polarizer 18 are aligned to one another and to the principle axis of light source 12, so as to ensure maximum light input into the sensing region. Polarization cross-coupling points caused by any misalignment of these axes, in combination with an imperfect polarizer, may result in the presence of small offsets in the current measurement and should be avoided as much as possible.

After the light passes through polarizer 18, it is divided substantially equally into X and Y light waves by a 45° splice 22 into the two eigen-axes, X and Y respectively, of a birefringence modulator pigtail 24. Birefringence modulator pigtail 24 is a section of

polarization maintaining fiber of sufficient length to depolarize the light passing through it. Birefringence modulator pigtail 24 is connected to a birefringence modulator 26, the X and Y eigen axes of these two components being aligned. Birefringence modulator 26 may be an integrated optics waveguide formed on Ti-indiffused LiNbO₃ with metallic electrodes surrounding the waveguide. Alternatively, a piezo-electric modulator may also be used. A voltage applied across the electrodes alters the birefringence of the waveguide. A modulation signal generated by a waveform generator (not shown) is applied to the electrodes of birefringence modulator 26 to dither or phase modulate the light beams. The modulation signal may be a variety of forms including, for example, sine wave modulation, square wave modulation, triangle wave modulation, serrodyne modulation, sawtooth modulation, and other suitable periodic waveforms. The modulation signal may also be a combination of a ramp function and a periodic waveform.

After the light is modulated in birefringence modulator 26, it enters a predetermined length of polarization maintaining fiber bus 30. The principle axes of polarization maintaining fiber bus 30 are aligned to the principle axes of the birefringence modulator 26. Polarization maintaining fiber bus 30 serves two purposes. The first is to carry the light to a passive sensing medium or sensing fiber 32, which typically is remotely located from the active elements such as light source 12 and birefringence modulator 26. The second purpose of polarization maintaining fiber bus 30 is to provide a time delay of sufficient length that the modulation signal applied at birefringence modulator 26 substantially changes

its value during the time it takes for the light to propagate from birefringence modulator 26 to sensing fiber 32 and return. Ideally, the fundamental dither frequency of the waveform applied to birefringence modulator 26 is $1/2\tau$ or odd multiples thereof, where τ is the propagation time for the light waves to travel from birefringence modulator 26 through sensing medium 32 and back.

After passing through polarization maintaining fiber bus 30, the light goes through a 45° splice 38, a zero or multiple order quarter wave plate 40 set at 45° to the principle axes of the polarization maintaining fiber bus 30, and a single mode fiber splice 42. The purpose of quarter wave plate 40 is to convert the orthogonally linearly polarized light from each of the principle axes of polarization maintaining fiber bus 30 to circular states of polarization. The quarter wave plate 40 is preferably constructed from a short section of long beat length polarization maintaining fiber, ideally a quarter of a polarization beat length long. An odd multiple of quarter beat lengths of length is also acceptable.

Therefore, two opposingly circularly polarized light waves are generated by quarter waveplate 40. The X light wave from the first principle axis or X axis of polarization maintaining fiber bus 30 is converted to a right hand circularly polarized (RHCP) light wave. The Y light wave from the second principle axis or Y axis of polarization maintaining fiber bus 30 is converted to a left hand circularly polarized (LHCP) light wave. The two circularly polarized light waves then pass through sensing fiber 32 wrapped around a current-carrying wire 44 at different velocities, accumulating a phase difference in proportion to the magnetic field component aligned with

sensing fiber 32. Sensing fiber 32 may be constructed from a single mode fiber having a low birefringence per unit length and wound an integral number of turns around current carrying wire 36. For most applications, one to
5 five loops of sensing fiber 32 around wire 44 has been shown to be sufficient.

A reflector 46, such as a mirror or mirrored surface, terminates sensing fiber 32. The light is reflected by mirror 46 and returns through sensing fiber 32 in the other
10 direction. The sense of circular polarization of the light is reversed upon reflection, causing the right hand circularly polarized light wave to be converted to be left hand circularly polarized for its return trip through
15 sensing fiber 32, and vice versa for the left hand circularly polarized light. Since the sense of polarization and the direction of the light are reversed for both light waves during their return trip through
20 sensing fiber 32, the relative differential phase shift accumulated between them during the first pass through sensing fiber 32 is doubled during the return trip. The total phase shift, $\Delta\phi$, accumulated between the two light waves in the double pass sensing region 60 is thus $\Delta\phi = 4VNI$,
where V is the Verdet constant of the fiber glass, N is the number of turns of sensing fiber around current carry wire
25 36 and I is the current flowing in wire 44.

After the light makes its double pass through sensing fiber 32, the light wave that was originally in the first principle axis of polarization maintaining fiber bus 30
30 returns to bus 30 linearly polarized along its second principle axis, and the light wave that was originally in the second principle axis of polarization maintaining fiber bus 30 returns to bus 30 linearly polarized along its first

principle axis. The light waves then pass through birefringence modulator 26 and its pigtail 24 a second time, and are brought together and interfered by 45° splice 22 and polarizer 18. A portion of this light is then coupled to a photodetector 46 via polarization maintaining beam splitter 16. A signal processing electronics circuit 50 coupled to photodetector 46 may be used to recover the non-reciprocal phase shift in the detected signal to provide a measurement output.

Therefore, the two light waves underwent exactly the same polarization evolution throughout the optical circuit, only in reverse order. Because sensing medium 32 is in-line with respect to the optic fiber, it may be seen that the sensing region around wire 36 is positioned at the midpoint of the optical path traversed by both light waves. Therefore, the only phase difference between the two light waves is that generated by the presence of a magnetic field in the sensing region. However, it has been shown that linear birefringence in sensing fiber 32 causes a scale factor error. The linear birefringence may be introduced by internal asymmetry in sensing fiber 32 or bending of the fiber around conductor 44. Because the linear birefringence and therefore the scale factor error vary with temperature changes, it is difficult to predict and eliminate.

FIGURE 2 shows a loop version of a fiber optic interferometric sensor 70 also experiencing the scale factor error introduced by linear birefringence in the sensing fiber. Sensor 70 includes a light source 72 such as a laser diode to generate a broadband light that is coupled into fiber 74. The light passes through a directional coupler and is linearly polarized by a fiber polarizer 78. The linearly polarized light is then coupled

into the loop portion of the sensor as two counter-propagating linearly polarized light waves by another directional coupler 80. A phase modulator 82 applies a periodic signal 84 to phase modulate or dither the light waves. Just before the two light waves enter a sensing region 86, they pass through quarter wave plates 88 and 90, respectively, oriented with the principle axes at 45° with respect to the axes of the polarization maintaining fiber. Quarter wave plates 88 and 90 convert the linearly polarized light to circularly polarized light.

Immediately following quarter wave plates 88 and 90 is a sensing fiber 92 preferably made from a low birefringence fiber. Sensing fiber 92 is wrapped around a current-carrying wire 94 one or more times. There is no fundamental advantage of using right or left handed circularly polarized light in the sensing region 86. Exiting sensing region 86, one circularly polarized light wave continues on and passes through quarter wave plate 88, and the other circularly light wave passes through quarter wave plate 90. Quarter wave plates 88 and 90 now convert both light waves back to linearly polarized light aligned with the polarization maintaining fiber 74. The returning light waves pass through directional couplers 80 and 76, and fall on a photodetector 100, which provides an output signal to a signal processor 102. Signal processor 102 then extracts the non-reciprocal phase shift in the detected signal and generates an output indicative of the magnitude of the current flowing in wire 94. However, similar to the in-line sensor, the loop sensor also suffers from errors caused by linear birefringence in the sensing fiber.

It may be shown mathematically that the total birefringence in the sensing fiber for both versions of the fiber optic interferometric sensor may be expressed as the

root sum square of the linear and the circular birefringence:

$$TOTAL\ BIREFRINGENCE = \sqrt{LINEAR^2 + CIRCULAR^2}$$

Therefore, the scale factor introduced by the effects of linear birefringence may be minimized or essentially eliminated if the circular birefringence component is much larger than the linear birefringence component. Fiber optic interferometric sensors 10 and 70 shown in FIGURES 1 and 2 are immune to the effects of circular birefringence because circularly polarized light is used in the sensing region. It has been shown in Bohnert, K. et al., "Field Test of Interferometric Optical Fiber High-Voltage and Current Sensors," Tenth International Conference on Optical Fiber Sensors, Proc. SPIE 2360, 16-19 (1994), that this characteristic is recognized and can be applied to fiber optic interferometric sensors by twisting the optic fiber in the sensing region to a large extent to suppress the effects of linear birefringence. To add and maintain a large number of twists in the optic fiber is impracticable because the tightly-wound fiber will typically creep over time. Further, because linear birefringence and therefore the scale factor error vary with temperature, the error is difficult to predict and to correct for.

According to the teachings of the present invention, a Jones Matrix may be composed for sensing region of the in-line fiber optic interferometric sensor, which represents the polarization evolution of the light in the sensing region from splice 42 to reflector 46:

$$L_s = \begin{bmatrix} A & B \\ -B^* & A^* \end{bmatrix}$$

A represents the transfer function of the light starting in the X polarization state and ending in X; B represents the transfer function of the light starting in the Y polarization state and ending in X; -B* represents the transfer function of the light starting in the X polarization state and ending in Y; and A* represents the transfer function of the light starting in the Y polarization state and ending in Y. More particularly,

$$A = \cos \sqrt{\left(\frac{\delta}{2}\right)^2 + (F + T)^2} + j \left(\frac{\delta}{2}\right) \frac{\sin \sqrt{\left(\frac{\delta}{2}\right)^2 + (F + T)^2}}{\sqrt{\left(\frac{\delta}{2}\right)^2 + (F + T)^2}}$$

10 and

$$B = (F + T) \frac{\sin \sqrt{\left(\frac{\delta}{2}\right)^2 + (F + T)^2}}{\sqrt{\left(\frac{\delta}{2}\right)^2 + (F + T)^2}}$$

where

T is the rotation caused by circular birefringence;

δ is linear birefringence; and

F is equal to VNI, where V is the Verdet constant, N is the number of fiber turns around the current carrying wire or the number of wire turns around the fiber, and I is the current.

The sensor output, $\Delta\Phi_{NR}$, which is the non-reciprocal phase shift accumulated between the two light beams traversing the sensing region, may be stated by:

$$\Delta\Phi_{NR} = \arg(E_1) - \arg(E_2)$$

$$E_1 = \begin{bmatrix} 0 & 0 \\ 0 & 1 \end{bmatrix} [L_{45^\circ}] [L_{\lambda/4}] [L_S^T(f-f)] [L_{mirror}] [L_S] [L_{\lambda/4}] [L_{45^\circ}] \begin{bmatrix} 1 \\ 0 \end{bmatrix}$$

$$E_2 = \begin{bmatrix} 1 & 0 \\ 0 & 0 \end{bmatrix} [L_{45^\circ}] [L_{\lambda/4}] [L_S^T(f-f)] [L_{mirror}] [L_S] [L_{\lambda/4}] [L_{45^\circ}] \begin{bmatrix} 0 \\ 1 \end{bmatrix}$$

$$\Delta\Phi_{NR} = -2F \frac{\left(\frac{\delta}{2}\right)^2 \frac{\sin 2 \sqrt{\left(\frac{\delta}{2}\right)^2 + T^2}}{2 \sqrt{\left(\frac{\delta}{2}\right)^2 + T^2}} + T^2}{\left(\frac{\delta}{2}\right)^2 \cos 2 \sqrt{\left(\frac{\delta}{2}\right)^2 + T^2} + T^2}$$

5 E_1 is the wave that arrives at the sensing head polarized in the \hat{x} direction and exits the sensing head polarized in the \hat{y} direction; E_2 is the wave that arrives at the sensing head polarized in the \hat{y} direction and exits the sensing head polarized in the \hat{x} direction.

10 Assuming F is small and therefore ignoring squared and higher order terms of F , the sensor output $\Delta\Phi_{NR}$, is $-2F$, independent of δ , provided:

$$\frac{\sin 2 \sqrt{\left(\frac{\delta}{2}\right)^2 + T^2}}{2 \sqrt{\left(\frac{\delta}{2}\right)^2 + T^2}} = \cos 2 \sqrt{\left(\frac{\delta}{2}\right)^2 + T^2}$$

or

$$\tan 2 \sqrt{\left(\frac{\delta}{2}\right)^2 + T^2} = 2 \sqrt{\left(\frac{\delta}{2}\right)^2 + T^2}$$

When $T \gg \delta/2$,

$$\tan 2T = 2T$$

which has a first non-zero solution of $T = 2.247$ radians or 128.7° . Therefore, it is desirable to have a circular birefringence such that the polarization state of the light is rotated by T being approximately 128° .

5 Therefore, for a given amount of linear birefringence, the scale factor error is a decaying oscillatory function of the amount of circular birefringence. As shown in the plot of FIGURE 4, it may be seen that for a wide range of linear birefringence values, the same amount of circular
10 birefringence suppresses the error. The first three solutions, T_1 , T_2 , and T_3 , where the scale factor error is zero for linear birefringences of 20, 30 and 40 degrees, are shown. Solving for T , it may be seen that the first three solutions are:

15

$$\begin{aligned} T_1 &= 2.247 \text{ radians or } 128.7^\circ \\ T_2 &= 3.8626 \text{ radians or } 221.3^\circ \\ T_3 &= 5.452 \text{ radians or } 312.4^\circ \end{aligned}$$

20 The first three solutions, particularly T_1 , may be easily achieved with a relatively few number of turns of the optic fiber in the sensing region. For example, to achieve $T_1 = 128.7^\circ$, only four or five turns of the optic fiber is needed to achieve this value of circular birefringence and
25 therefore effectively eliminate or greatly reduce the scale factor error caused by linear birefringence. It may be also seen from this graph that a large number of twists in the fiber introducing a large amount of circular birefringence also tends to cancel out the effects of
30 linear birefringence. However, it is impracticable to

achieve and maintain the such large number of twists in the fiber.

For the loop version of fiber optic interferometric sensor shown in FIGURE 2, the scale factor error is also a
5 decaying oscillatory function, values of T which eliminate the effects of linear birefringence are given by solutions to the equation:

$$\tan T = T,$$

It may be seen that the in-line sensor is a double-path device, where the error caused by linear birefringence in
10 the sensing region is experienced twice or doubled. In the loop version, the light travels through the sensing region only once. Therefore, the general solution of interest to suppress linear birefringence in the loop version is $\tan T = T$, where zero scale factor error occurs at:

$$\begin{aligned} T_1 &= 4.493 \text{ radians or } 257.4^\circ \\ T_2 &= 7.725 \text{ radians or } 442.6^\circ \\ T_3 &= 10.904 \text{ radians or } 624.8^\circ \end{aligned}$$

15
20 for the first three solutions. Polarization state rotation of approximately 257° may be easily achieved by twisting the fiber approximately 8 to 10 times.

The circular polarization of the light in the sensing fiber rotation may be achieved by a number of ways. The
25 sensing fiber may be twisted by adding rotation along its longitudinal axis a predetermined number of times during sensor installation. The sensing fiber may be twisted by the predetermined number of times during manufacture. Alternative, circular birefringence may be incorporated by
30 using a helical sensing configuration 100, as shown in FIGURE 3. In a sensing region of a fiber optic

interferometric sensor of the present invention, a generally circular hoop 104 constructed of a nonconductive material such as plastic, fiber glass, plexiglass, or other suitable materials is positioned around a current carrying wire 106. A sensing fiber 108 carrying the sensing light is wound helically around hoop 104. To close the path the light travels around current carrying wire 106, optic fiber 108 is wound around hoop 104 so that it enters and exits sensing region 102 at substantially the same location or very closely together as shown. When used for the in-line sensor, the exit end of the sensing fiber is terminated with a reflector. The geometric torsion τ of the helix is:

$$\tau = \frac{\sin\theta \cos\theta}{Q}$$

where θ is the pitch angle; and
 Q is the radius of the helix.

The relationship between T and τ is:

$$T = N\tau$$

where N is the number of turns in the helix. Therefore, the zero scale factor error solutions of the present invention may be achieved by:

$$T = N \frac{\sin\theta \cos\theta}{Q}$$

Thus, by choosing the pitch angle and radius of the helix, the solutions of the in-line and loop sensors, for example 128° and 257° , may be achieved in this manner.

The teachings of the present invention is also applicable to the suppression of linear birefringence in

bulk optic current sensors by introducing a predetermined amount of circular birefringence as set forth above.

5 Although several embodiments of the present invention and its advantages have been described in detail, it should be understood that mutations, changes, substitutions, transformations, modifications, variations, and alterations can be made therein without departing from the teachings of the present invention, the spirit and scope of the invention being set forth by the appended claims.

WHAT IS CLAIMED IS:

1. A fiber optic interferometric sensor, comprising:
a sensing fiber forming a closed optical path around
a current-carrying conductor;

5 two circularly polarized light waves traveling on the
closed optical path around the current-carrying conductor;
and

the sensing fiber having a predetermined number of
twists and causing a predetermined amount T of circular
10 rotation of the polarization state of the light waves,
thereby reducing a scale factor error introduced by linear
birefringence in the sensing fiber.

2. The fiber optic interferometric sensor, as set
15 forth in claim 1, wherein the sensing fiber has a circular
birefringence rotation T , where $\tan 2T = 2T$.

3. The fiber optic interferometric sensor, as set
forth in claim 1, wherein the sensing fiber rotates the
20 circular polarization state of the two light waves by
approximately 128° .

4. The fiber optic interferometric sensor, as set
forth in claim 3, wherein the sensing fiber has less than
25 six twists.

5. The fiber optic interferometric sensor, as set
forth in claim 1, wherein the sensing fiber has a circular
birefringence rotation T , where $\tan T = T$.

30 6. The fiber optic interferometric sensor, as set
forth in claim 1, wherein the sensing fiber rotates the
circular polarization state of the two light waves by
approximately 257° .

7. The fiber optic interferometric sensor, as set forth in claim 6, wherein the sensing fiber has 8 to 10 twists.

5 8. The fiber optic interferometric sensor, as set forth in claim 1, further comprising a generally circular hoop around the current-carrying conductor, and the sensing fiber being wound around the circular hoop in a helical manner and forming a substantially closed path around the
10 conductor.

9. The fiber optic interferometric sensor, as set forth in claim 8, wherein the sensing fiber is wound as a helix having a circular birefringence rotation T:

$$T = N \frac{\sin \theta \cos \theta}{Q}$$

15 where θ is the pitch angle;
 Q is the radius of the helix; and
 N is the number of turns in the helix; and
 $\tan 2T = 2T$.

20 10. The fiber optic interferometric sensor, as set forth in claim 8, wherein the sensing fiber is wound as a helix having a circular birefringence rotation T:

$$T = N \frac{\sin \theta \cos \theta}{Q}$$

where θ is the pitch angle;
 Q is the radius of the helix; and
25 N is the number of turns in the helix; and
 $\tan T = T$.

11. An in-line fiber optic interferometric sensor, comprising:

a sensing fiber forming a closed optical path around a current-carrying conductor;

5 two circularly polarized light waves traveling on the closed optical path around the current-carrying conductor; and

10 the sensing fiber having a predetermined number of twists and causing a predetermined amount T of circular rotation of the polarization state of the light waves, where $\tan 2T = 2T$, thereby reducing a scale factor error introduced by linear birefringence in the sensing fiber.

12. The fiber optic interferometric sensor, as set forth in claim 11, wherein the sensing fiber rotates the circular polarization state of the two light waves by approximately 128° .

13. The fiber optic interferometric sensor, as set forth in claim 11, wherein the sensing fiber has less than six twists.

14. The fiber optic interferometric sensor, as set forth in claim 11, further comprising a generally circular hoop around the current-carrying conductor, and the sensing fiber being wound around the circular hoop in a helical manner and forming a substantially closed path around the conductor.

15. The fiber optic interferometric sensor, as set forth in claim 14, wherein the sensing fiber is wound as a helix having a circular birefringence rotation:

$$T = N \frac{\sin \theta \cos \theta}{Q}$$

where θ is the pitch angle;
Q is the radius of the helix; and
N is the number of turns in the helix.

16. A loop fiber optic interferometric sensor, comprising:

a sensing fiber forming a closed optical path around a current-carrying conductor;

5 two circularly polarized light waves traveling on the closed optical path around the current-carrying conductor; and

10 the sensing fiber having a predetermined number of twists and causing a predetermined amount T of circular rotation of the polarization state of the light waves, where $\tan T = T$, thereby reducing a scale factor error introduced by linear birefringence in the sensing fiber.

15 17. The fiber optic interferometric sensor, as set forth in claim 16, wherein the sensing fiber rotates the circular polarization state of the two light waves by approximately 257° .

20 18. The fiber optic interferometric sensor, as set forth in claim 16, wherein the sensing fiber has less than 12 twists.

25 19. The fiber optic interferometric sensor, as set forth in claim 16, further comprising a generally circular hoop around the current-carrying conductor, and the sensing fiber being wound around the circular hoop in a helical manner and forming a substantially closed path around the conductor.

20. The fiber optic interferometric sensor, as set forth in claim 19, wherein the sensing fiber is wound as a helix having a circular birefringence rotation:

$$T = N \frac{\sin \theta \cos \theta}{Q}$$

where θ is the pitch angle;
Q is the radius of the helix; and
N is the number of turns in the helix.

21. A method of forming a sensing fiber for a fiber optic interferometric sensor, comprising the steps of:

adding a predetermined amount of circular birefringence to the sensing fiber; and

5 forming a closed path around a current-carrying conductor with the sensing fiber.

22. The method, as set forth in claim 21, wherein the circular birefringence adding step comprises the step of
10 twisting the sensing fiber to achieve a rotation in the circular polarization state by T , where $\tan 2T = 2T$.

23. The method, as set forth in claim 21, wherein the circular birefringence adding step comprises the step of
15 twisting the sensing fiber to achieve a rotation in the circular polarization state by approximately 128° .

24. The method, as set forth in claim 21, wherein the circular birefringence adding step comprises the step of
20 twisting the sensing fiber to achieve a rotation in the circular polarization state by T , where $\tan 2T = 2T$.

25. The method, as set forth in claim 21, wherein the circular birefringence adding step comprises the step of
25 twisting the sensing fiber to achieve a rotation in the circular polarization state by approximately 257° .

26. The method, as set forth in claim 21, wherein the circular birefringence adding step comprises the step of
30 winding the sensing fiber around a circular hoop in a helical manner and forming a substantially closed path around the conductor.

27. The method, as set forth in claim 26, wherein the sensing fiber winding step comprises the step of winding the circular hoop as a helix having a circular birefringence rotation:

$$T = N \frac{\sin \theta \cos \theta}{Q}$$

5 where θ is the pitch angle;
 Q is the radius of the helix; and
 N is the number of turns in the helix.

INTERNATIONAL SEARCH REPORT

International Application No

PCT/US 98/12341

A. CLASSIFICATION OF SUBJECT MATTER
IPC 6 G01R15/24

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 6 G01R

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	FROSIO G ET AL: "RECIPROCAL REFLECTION INTERFEROMETER FOR A FIBER-OPTIC FARADAY CURRENT SENSOR" APPLIED OPTICS, vol. 33, no. 25, 1 September 1994, pages 6111-6122, XP000473296	1,8,21, 26
A	see page 6111, right-hand column, paragraph 2 - page 6113, left-hand column, paragraph 1 see page 6117, left-hand column, paragraph 3 - page 6118, left-hand column, paragraph 1; figures 1,3,4 ----- -/--	7,11,16, 18

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"&" document member of the same patent family

Date of the actual completion of the international search

12 October 1998

Date of mailing of the international search report

21/10/1998

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Iwansson, K

INTERNATIONAL SEARCH REPORT

Intern. Application No

PCT/US 98/12341

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	DE 28 35 794 A (MAX. PLANCK-GESELLSCHAFT) 28 February 1980 see page 11, paragraph 3 - page 13, paragraph 1 see page 20, paragraph 1 - page 21, paragraph 1; figures 1,3 -----	1-27
A	GB 2 190 744 A (JINGREN ET AL.) 25 November 1987 see page 2, line 14 - line 73; figures 1-4 -----	1

INTERNATIONAL SEARCH REPORT

information on patent family members

International Application No

PCT/US 98/12341

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
DE 2835794 A	28-02-1980	CH 644209 A GB 2033601 A,B US 4255018 A	13-07-1984 21-05-1980 10-03-1981
GB 2190744 A	25-11-1987	EP 0267256 A WO 8707387 A JP 1500615 T	18-05-1988 03-12-1987 01-03-1989

2/2

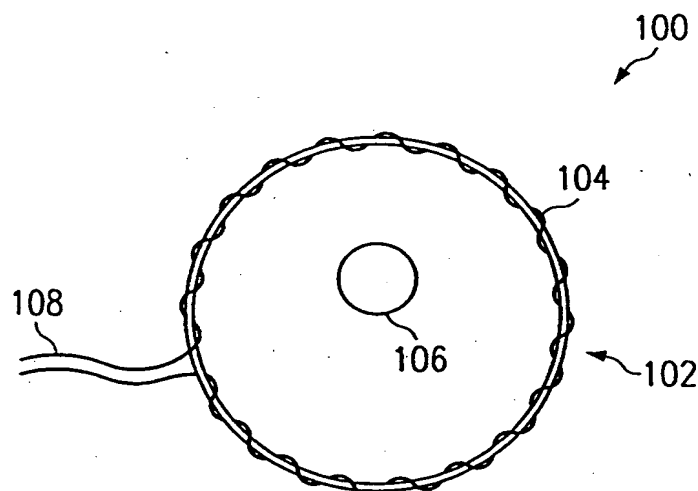


FIG. 3

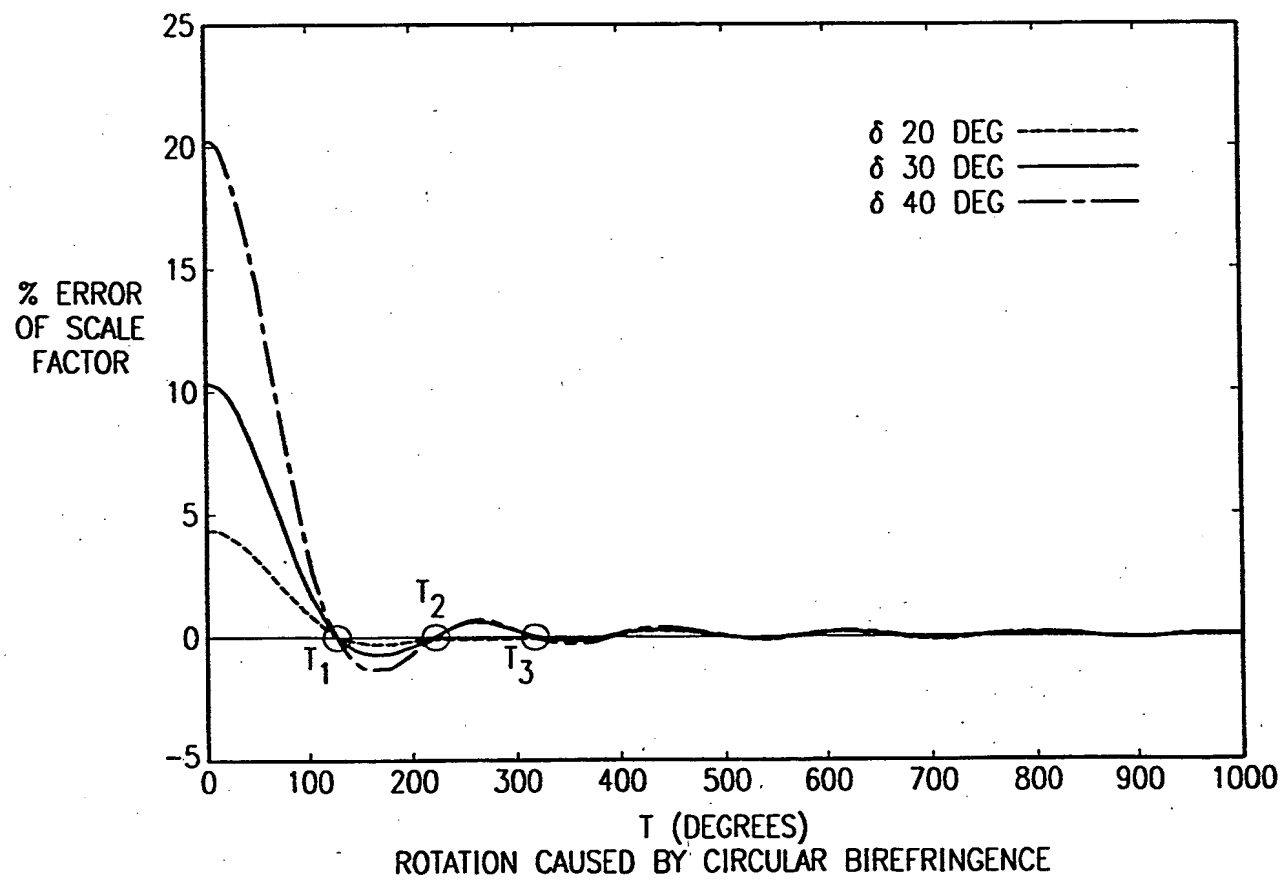


FIG. 4

1/2

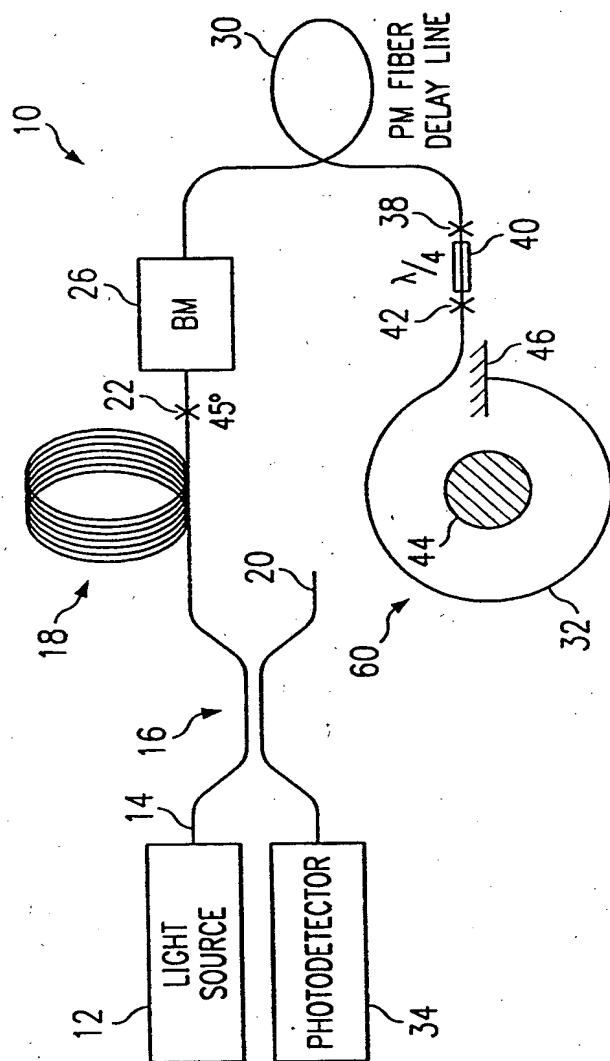


FIG. 1

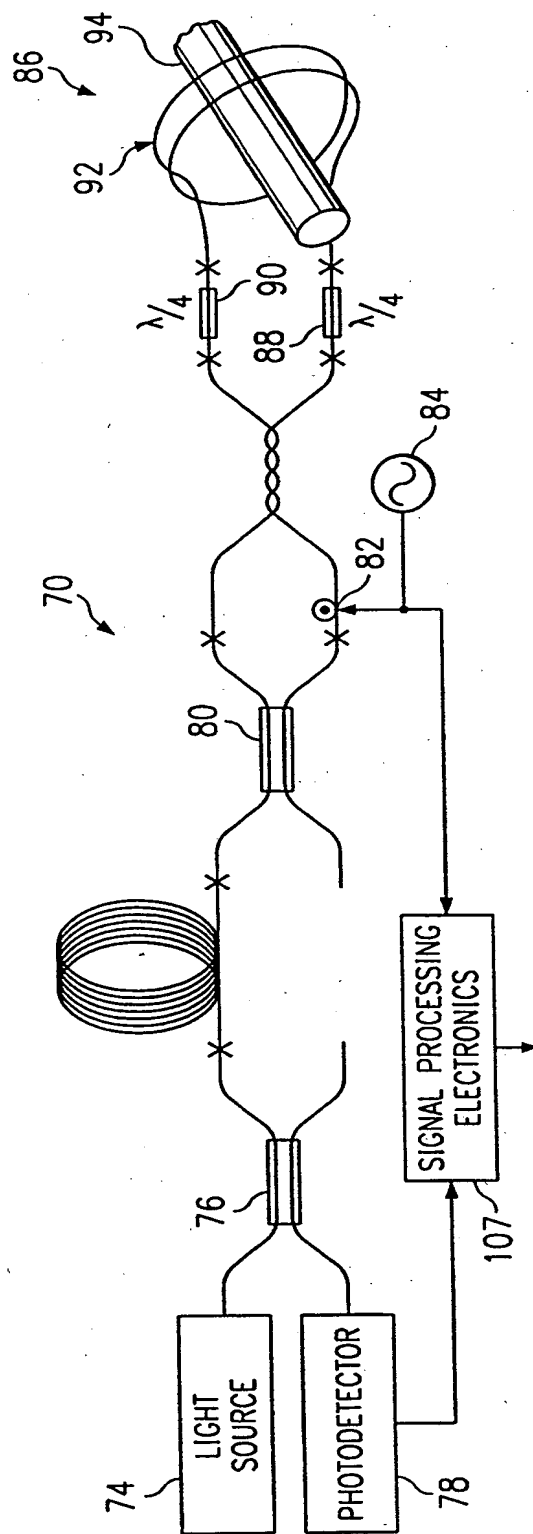


FIG. 2